TJERNLUND PRODUCTS, INC.
1601 Ninth Street • White Bear Lake, MN 55110-6794
PHONE (800) 255-4208 • (651) 426-2993 • FAX (651) 426-9547
Visit our web site • www.tjernlund.com


Patented

side wall vent systems

MODELS

VP-2 For Millivolt Water Heaters up to 60,000 BTU/hr

VP-3 For Millivolt Water Heaters from 60,000 to 120,000 BTU/hr

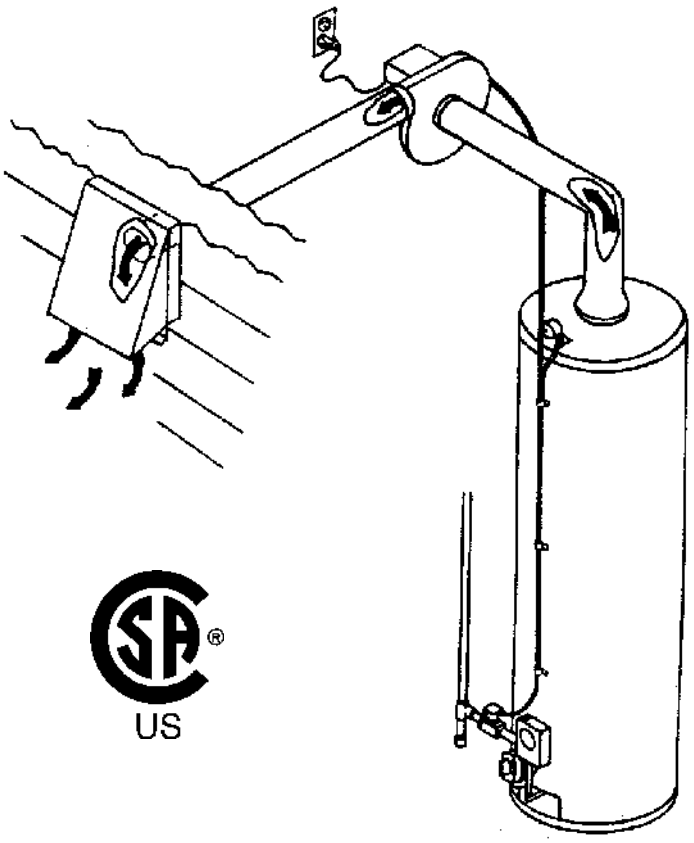

US

OWNERS INSTRUCTIONS
THESE INSTRUCTIONS MUST REMAIN WITH EQUIPMENT
DO NOT DESTROY

ALWAYS FOLLOW WATER HEATER MANUFACTURER'S INSTRUCTIONS FOR PROPER OPERATION OF HEATER AND RE-LIGHTING OF PILOT

WATER HEATER VENT PACKAGE

For Natural Gas or LP

NOTE:
The VP-2 and VP-3 Water Heater Vent Packages use a solenoid valve as part of the safety interlock circuit. The solenoid valve is installed in the gas supply piping to the water heater's thermostat/valve. To save installation time, do not pipe gas to water heater before installing the gas solenoid valve.

OPTIONAL PILOT SAVER KIT AVAILABLE
The optional Pilot Saver Kit (P/N: 950-2061) allows for Solenoid Valve to be installed in 1/2" burner gas line from water heater gas valve to burner, eliminating pilot outages caused by power interruptions.

Copyright © 2000, Tjernlund Products, Inc. All rights reserved.